


No. CH-54

Unit : mm

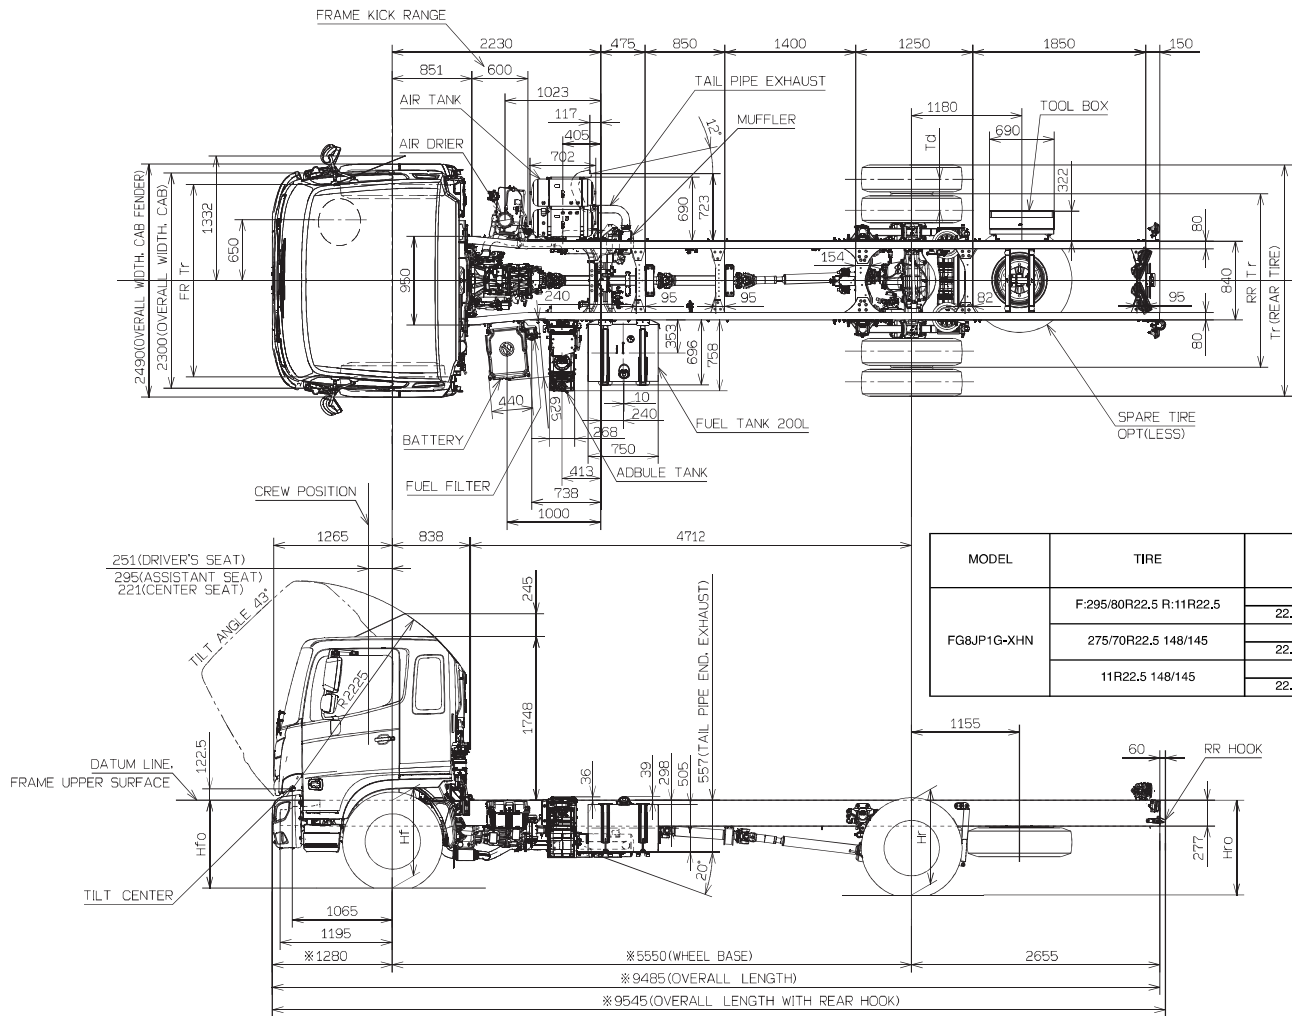

| MODEL       | TIRE                    | WHEEL           | GROUND HEIGHT, FRAME UPPER SURFACE |      |      |      | FR Tr | RR Tr | Tr   | Td  |
|-------------|-------------------------|-----------------|------------------------------------|------|------|------|-------|-------|------|-----|
|             |                         |                 | Hf0                                | Hf   | Hr   | Hr0  |       |       |      |     |
| FG&JP1G-XHN | F:295/80R22.5 R:11R22.5 | 22.5X8.25       | 1010                               | 1015 | 1030 | 1035 | 2050  | 1835  | 2445 | 330 |
|             |                         | 22.5X8.25 ALLOY | 1010                               | 1015 | 1030 | 1035 | 2070  | 1855  | 2465 | 330 |
|             | 275/70R22.5 148/145     | 22.5X8.25       | 970                                | 975  | 985  | 990  | 2050  | 1835  | 2445 | 330 |
|             |                         | 22.5X8.25 ALLOY | 970                                | 975  | 985  | 990  | 2070  | 1855  | 2460 | 330 |
|             | 11R22.5 148/145         | 22.5X8.25       | 1015                               | 1020 | 1030 | 1035 | 2050  | 1835  | 2445 | 330 |
|             |                         | 22.5X8.25 ALLOY | 1015                               | 1020 | 1030 | 1035 | 2070  | 1855  | 2465 | 330 |

NOTE: 1.Figures marked "\*" dimensions are measured in parallel with the surface of the ground.  
 2.The dimension of tire to be mentioned in above table shows design figure according to JATMA or ETRTO standard.